



Teleskopska klizna grla hoda 300 mm

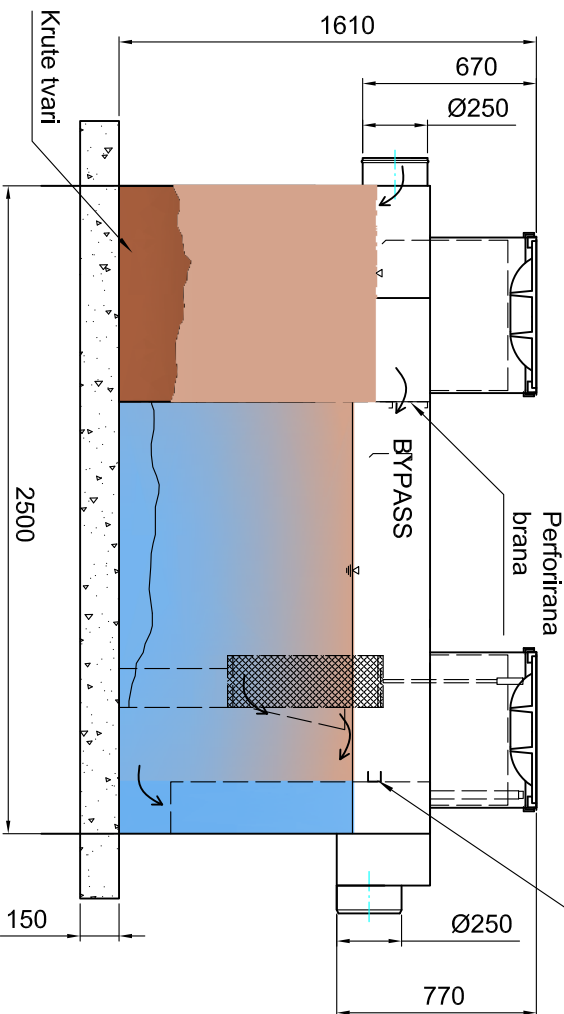


Kontrola opterećenosti


Klizno grlo hoda 300 mm
Regulacija vijcima M10 x 20

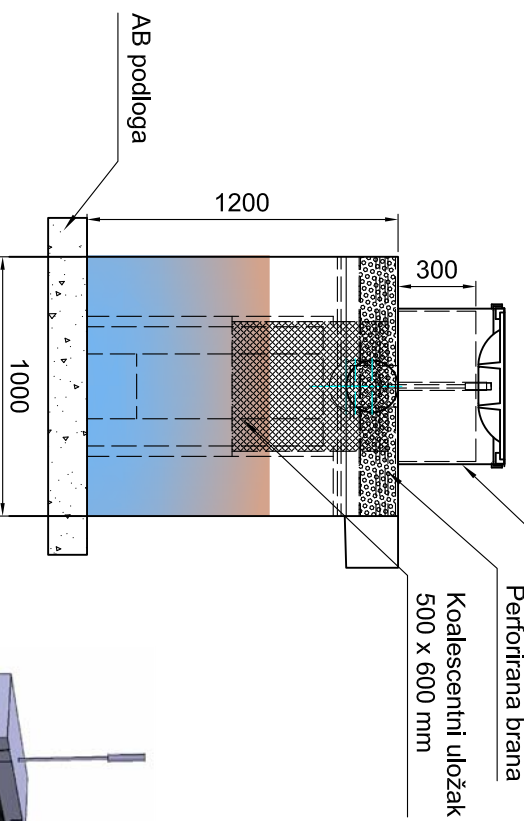

Perforirana brana
Koalescentni uložak
500 x 600 mm

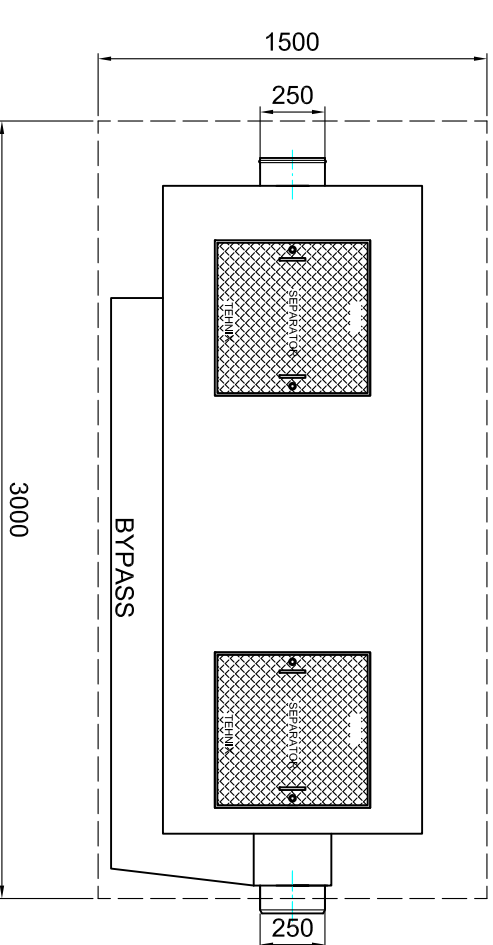

Volumen separatora: 2500 l
Protok separatora: 6/24 l/s
Cijevi: Ø250
Masa praznog separatora: 500 kg
Masa punog separatora 3000 kg

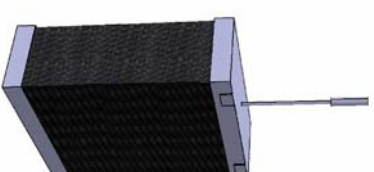

Polipropilenski koalescentni uložak
Separatori spadaju u I. klasu separatora prema hrvatskoj normi HRN EN 858 što znači da je količina rezidualnog ulja manja od 5 mg/l

Površina	Mjerilo	1:20	Pozicija	-	Masa	-

EN 858

Separator 2500 I

Q=6,0/24,0 lit/sec

Datum	Ime	Potpis
	Čiao	
	Prekonti	
	Odobio	
	Levadic I. dipl.ing.str.	
	Hoval D. mag.ing.mech.	
	Hoval D. str.leh.hec	

Tehnix

TX-DK-D-1907-SEP2500BP-S1

rad/bil	Promjena	Datum	Ime	Spremljeno
				TX-DK-D-1907-SEP2500BP-S1